


PROCESS INNOVATIONS, INC.
P.O. BOX 25 FOWLER, OH 44418

TEL: 330-856-5192
FAX: 330-394-1122

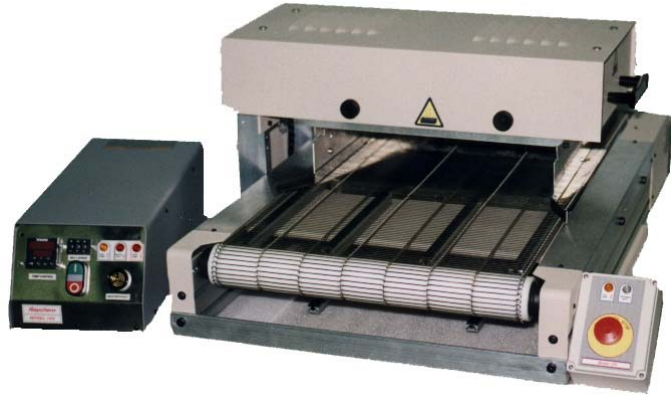

MODEL 105 FEATURES

1. Two piece construction with plug connected remote control enclosure.
2. One meter standard conveyor length.
3. Two height positions for the upper element assembly.
4. "0" Voltage detect circuitry to prevent machine restart after a power outage.
5. Two 8" x 15.25" opposing 1500 Watt infrared elements.
6. Adjustable heat shields on the front and rear of the upper element assembly.
7. Cantilevered upper element assembly.
8. DC drive motor for conveyor speeds of 0.2 to 5.0 FPM.
9. Operating temperatures to 650C.
10. 20 Minute solid state cool-down timer.
11. E-Stop circuitry for immediate shut-down in a critical condition.
12. Quarter-Turn fasteners for easy removal of upper sheet metal cover.
13. CE compliant electrical components.
14. **Custom entry and exit conveyor length extensions up to 200"**.
15. **Optional floor stand assemblies with locking casters.**



Model 105M with 24" entry extension and 56" exit extension.



Model 105M with 24" entry extension and 36" exit extension.